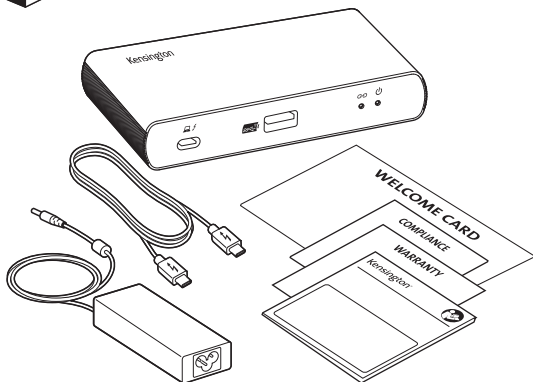# Kensington®

SD2600T Thunderbolt™ 4 Nano Dock

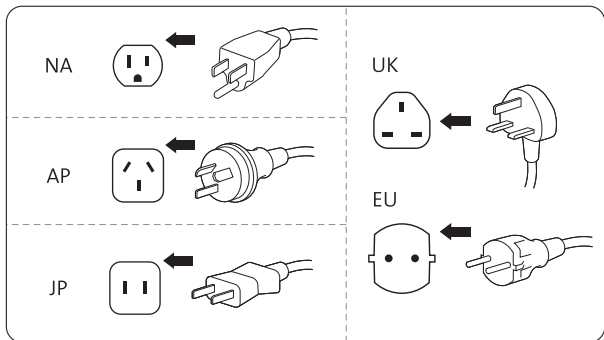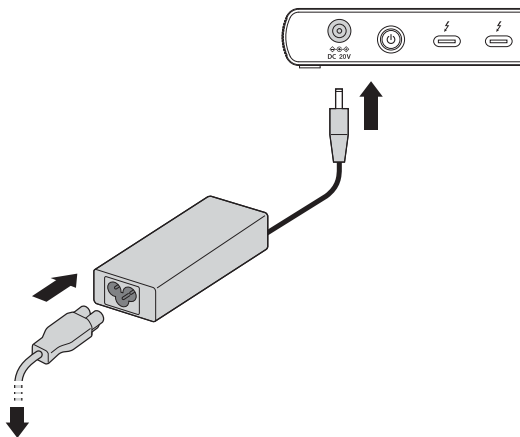| NA | EU | UK | AP | JP |

kensington.com/register

❶

NA		UK	
AP		EU	
JP			

2

Thunderbolt4 DFP (5V/3A)

DC 20V

Up to 65W

Thunderbolt™ 4

1 x USB-A 3.2 Gen2 10Gbps
(5V/1.5A, support BC 1.2)

3

Thunderbolt™ 4

4

Kensington
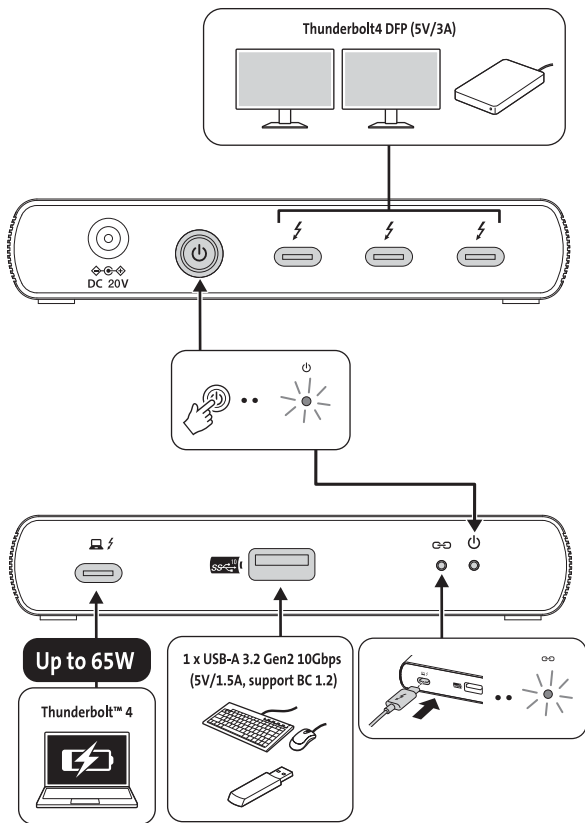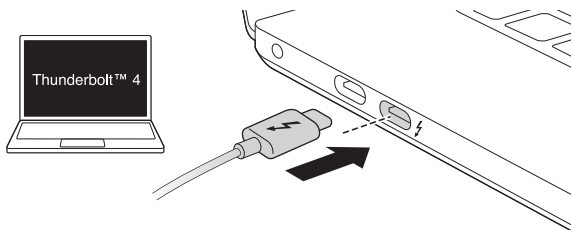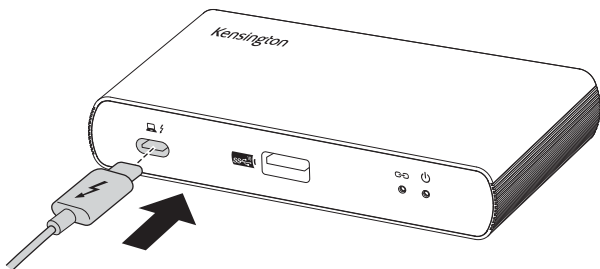
5

Thunderbolt™ 3 / Thunderbolt™ 4 / USB4 (Windows)	8K (7680 x 4320) @ 60Hz*	4K (3840 x 2160) @ 60Hz
Thunderbolt™ 3 / Thunderbolt™ 4 / USB4 (macOS)	6K (6016 x 3384) @ 60Hz	4K (3840 x 2160) @ 60Hz
MacBook M-series Pro / Max	6K (6016 x 3384) @ 60Hz	6K (6016 x 3384) @ 60Hz*
USB-C Alt Mode (Windows)	4K (3840 x 2160) @ 60Hz	
iPad & MacBook M-series	6K (6016 x 3384) @ 60Hz	

*Support for Display Stream Compression (DSC) is based on the host device and monitor capabilities

	Hz	Hz Hz
Thunderbolt™ 3 / Thunderbolt™ 4 / USB4 (Windows)	4K (3840 x 2160) @ 120Hz or 1440p (2560 x 1440) @ 240Hz	1080p (1920 x 1080) @ 120Hz

6   Initial Thunderbolt™ 4 connection for Windows

New Thunderbolt™ device have been attached

Thunderbolt™ devices were attached. In order to approve them for use this application must be run with administrator privileges.
Click OK to run the **Thunderbolt**™ software with administrator privileges.

OK   Cancel

6.1   Manage Thunderbolt™ 4 devices and settings later

6.2

View Attached Devices
Approve Attached Devices ›
Manage Approved Device

Settings
Exit

www.kensington.com/support

K34036

901-8202-01